

Trims for 4" Line Voltage MR16 Recessed Housings

Catalog No. _____

Type _____

Project _____

Maximum lamp rating for most trim options: 45W 120V MR16 lamp, GV8.0 base.


**On fixtures designed for use with standard MR16 lamps, Con-Tech provides a clear tempered safety lens.*

If use of MR16 with front glass is required, remove the factory provided clear tempered safety lens.

All trims have white trim finish unless specified.

All trims are cULus listed.

All trims are suitable for damp locations.



Baffled Downlight

Standard Trim, 5-1/2" O.D.

CTR1601-B

Adjustable Black Baffle, Black Trim Ring

CTR1601-P

Adjustable Black Baffle

CTR1601-P-WHT

Adjustable White Baffle

Narrow Trim, 4-15/16" O.D.

CTR1601N-P

Adjustable Black Baffle

CTR1601N-P-WHT

Adjustable White Baffle

Cast Aluminum Trim, 5-1/8" O.D.

CTR1601-PA

Adjustable Black Baffle


CTR1601-PA-WHT

Adjustable White Baffle

CTR1601-BA

Black Baffle, Black Cast Aluminum Trim Ring

Deep baffle traps stray light and conceals lamp. May be used as a downlight or adjustable accent light with 60° swing adjustment. May be used with multiple light controlling elements (colored lens, spread lens, louver, etc). Trims use a stepped lens holder design: insert 45mm lens on lower level of adjustable lamp seat, install 50mm lens on the higher position.

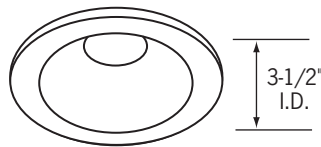

Multiplier

Standard Trim, 5-1/2" O.D.

CTR1602-B-BLK

Black Multiplier, Black Trim Ring

CTR1602-P-(BLK, CLR, WHT, PL)

Choice of Multiplier Finish, White Trim Ring

CTR1602-(NK, ST)-CLR

Clear Multiplier, Choice of Metal Finish Trim Ring

Narrow Trim, 4-15/16" O.D.

CTR1602N-B-BLK

Black Multiplier, Black Trim Ring


CTR1602N-P-(CLR, WHT)

Choice of Multiplier Finish, White Trim Ring

Cast Aluminum Trim, 5-1/8" O.D.

CTR1602-PA-(CLR, WHT)

Utilizes a highly polished specular reflector to maximize light intensity while concealing light source. May be used as a downlight or adjustable accent light with 35° swing adjustment. May be used with multiple light controlling elements (colored lens, spread lens, louver, etc). Trim uses a stepped lens holder design: insert 45mm lens on lower level of adjustable lamp seat, install 50mm lens on the higher position.



1-5/16" x 2-1/4"
Oblong Slot

Slotted Wall Wash

Standard Trim, 5-1/2" O.D.

CTR1603-P


Narrow Trim, 4-15/16" O.D.

CTR1603N-P

Cast Aluminum Trim, 5-1/8" O.D.

CTR1603-PA

Slot aperture permits maximum beam area adjustment for either wall wash or concealed accent lighting effects. 50° swing adjustment and 358° rotation.

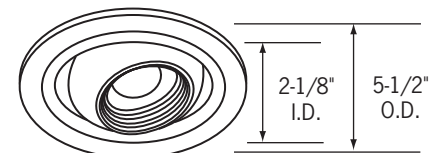

CTR1608-P

Adjustable Classic Eyeball, Black Baffle

45° Vertical adjustment, 358° horizontal rotation.
50mm Lens.

Reflector/Trim Finishes

Reflector Finish Options:

BLK - Black
CLR - Clear
PL - Matte Platinum
WHT - White

Trim Finish Codes:

BA - Black Cast Aluminum
B - Black
NK - Brushed Nickel
P - White
PA - White Cast Aluminum
ST - Brushed Stainless Steel

