


EX2HRLEDEM EX2HGLEDEM

LED Exit/Emergency Light
Combination with
Battery Back-Up

Catalog No. _____

Type _____

Project _____

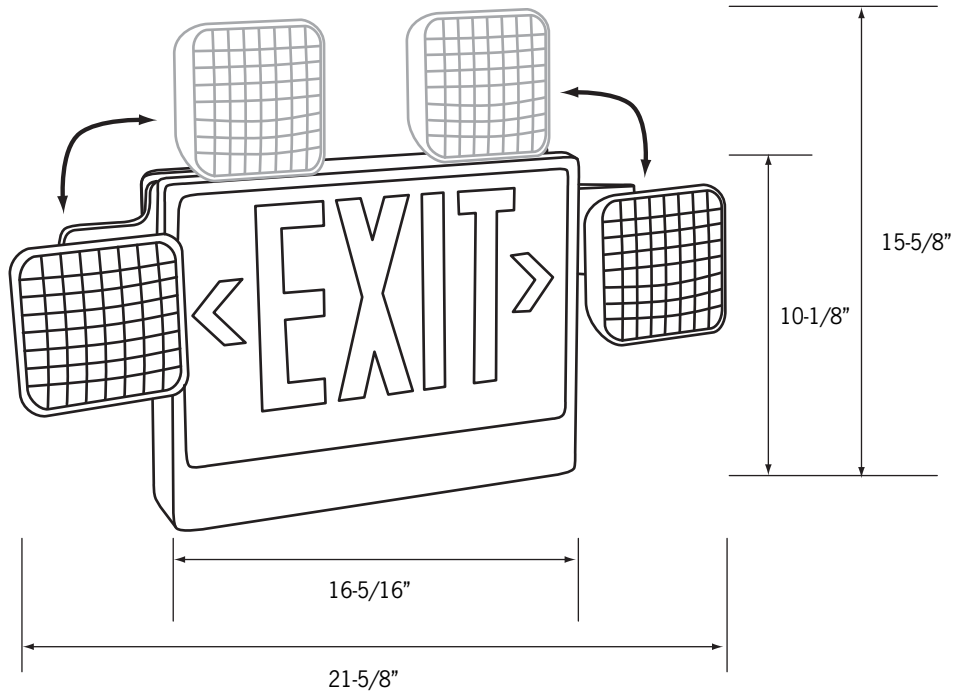

Specifications/Features

Housing

Injection molded thermoplastic housing.
UL 94V-0 flame rating.
Innovative, snap-together design allows for fast installation.
Replaceable directional chevron inserts are easily removed/reinserted.
Letters are 6" high with a 3/4" stroke.
Single or double face configuration.
Two fully adjustable glare-free square shape light heads for emergency light.
Expected LED life of up to 10 years.

Mouting

Wall or ceiling mount.
Simple twist and lock action tightly secures housing to canopy.

Electrical

120/277 VAC dual voltage operation.

Low energy consumption: 3.8W at normal (120V) operation, 15W at emergency operation.
LED indicator light and push button test switch.
LEDs mounted on print circuit board (for Exit sign).
LED lamps operate in normal (AC input) and emergency (DC input) modes.
(2) 6V 5.4W DC T5 wedge base lamps for emergency mode.
Lead-Calcium battery (6V 4.5Ah) delivers minimum 90 min. discharge.
Low voltage battery disconnection prevents deep discharge damage to the battery.

Warranty

This fixture is covered by Con-Tech's full five (5) year replacement guarantee after date of purchase.

Listing

ULus listed.
Meets UL924 and NFPA101.

Ordering Information

Example Order: -

Fixture

EX2HRLEDEM - Red LED Exit Combo with Battery Back-up
EX2HGLEDEM - Green LED Exit Combo with Battery Back-up

Finish

B - Black
P - White

