



# EXOHRLED EXOHGLED

## LED Exit Sign

Catalog No. \_\_\_\_\_

Type \_\_\_\_\_

Project \_\_\_\_\_

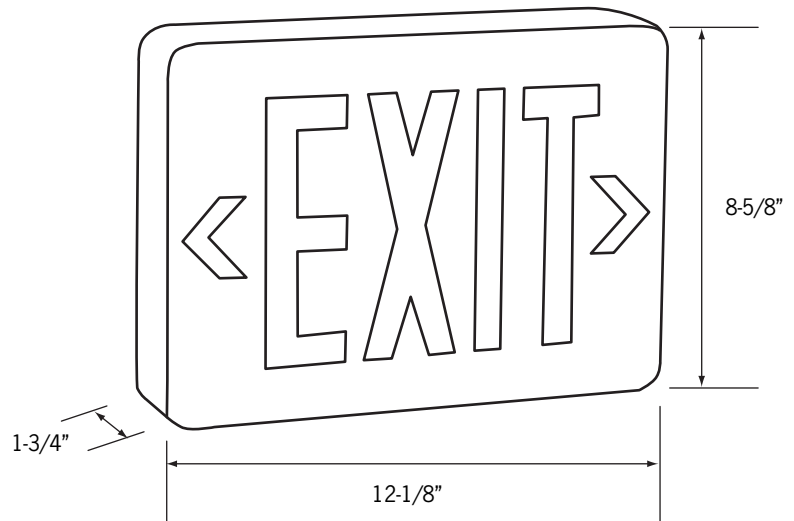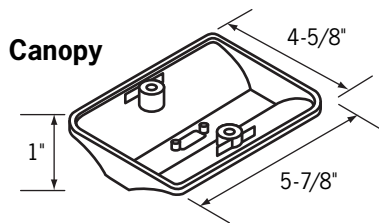

### Specifications/Features

#### Housing

Injection-molded thermoplastic housing.  
UL 94V-0 flame rating.  
Innovative, snap-together design allows for fast installation.  
Replaceable directional chevron inserts are easily removed and reinserted.  
Letters are 6" in height with a 3/4" stroke.  
Single or double face configuration.

#### Mouting

Universal (wall, side or ceiling) mounting.  
Simple twist and lock action tightly secures housing to canopy.

#### Electrical

120/277 VAC dual voltage operation.  
Low energy consumption: 2.1W @ 120V.

LEDs mounted on print circuit board.  
LED lamps operate in normal (AC input) modes.  
AC use only, no battery back-up.  
Expected LED life of up to 10 years.

#### Warranty

This fixture is covered by Con-Tech's full five (5) year replacement guarantee after date of purchase.

#### Listing

ULus listed.  
Meets UL924 and NFPA101.

### Ordering Information

Example Order:  -

Fixture

**EXOHRLED** - Red LED Exit Sign  
**EXOHGLED** - Green LED Exit Sign

Finish

**B** - Black Housing  
**P** - White Housing

