



EXOHRLEDEM EXOHGLEDEM

**LED Exit Sign
with Battery Back-up**

Catalog No. _____

Type _____

Project _____

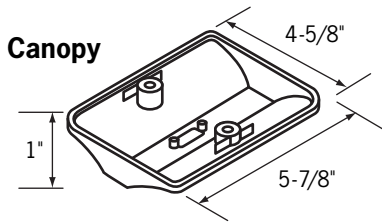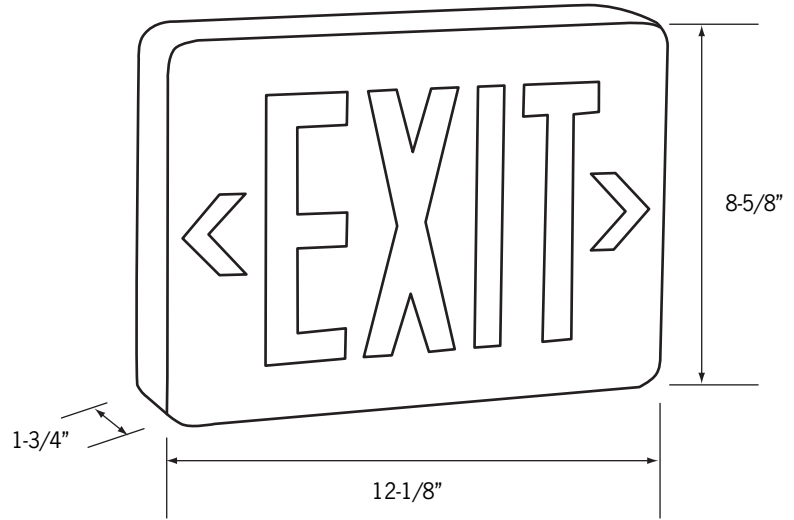

Specifications/Features

Housing

Injection-molded thermoplastic housing.
UL 94V-0 flame rating.
Innovative, snap-together design allows for fast installation.
Replaceable directional chevron inserts are easily removed and reinserted.
Letters are 6" in height with a 3/4" stroke.
Single or double face configuration.
LED Indicator light and test switch.

Mouting

Universal (wall, side or ceiling) mounting.
Simple twist and lock action tightly secures housing to canopy.

Electrical

120/277 VAC dual voltage operation.
Low energy consumption: 2.4 watts @ 120V.

Nickel-Cadmium battery (4.8V 650mA) delivers more than 3 hours of emergency power.
After 90 minutes discharge, the battery needs 24 hours to recharge to full capacity.
Low voltage battery disconnection prevents deep discharge damage to the battery.
Expected LED life of up to 10 years.

Warranty

This fixture is covered by Con-Tech's full five (5) year replacement guarantee after date of purchase.

Listing

ULus listed.
Meets UL924 and NFPA101.

Ordering Information

Example Order: -

Fixture

EXOHRLEDEM - Red LED Exit Sign
EXOHGLEDEM - Green LED Exit Sign

Finish

B - Black Housing
P - White Housing

