


LT

**Single Circuit
Line Voltage Track**

Catalog No. _____

Type _____

Project _____

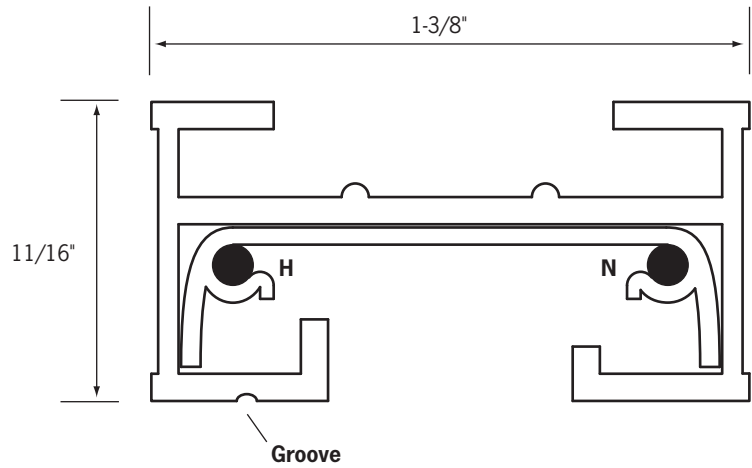

Track Section End View



Specifications/Features

Track

A myriad of configurations are possible with these 120V/20A rated commercial grade track sections. Low profile track cross-section; an economic solution for most applications.

Track has solid copper conductors with Noryl® insulators placed in heavy 14 ga. extruded aluminum channels.

Mechanical polarity with a visual indicator simplifies installation and mounting of fixtures while assuring proper electrical connections. All Con-Tech track fixtures have two position contacts to access 1-circuit conductors.

Toggle bolts are supplied for simple surface installation.

Nominal length track sections can be cut in the field for exact fit.

Strong "H" design construction.

Track sections may be mounted within Con-Tech's Recessed Track Housing System to minimize appearance.

Mounting accessories available for T-Bar clips, stems, threaded rods, and aircraft cable.

All track sections are supplied with two insulated end caps.

Warranty

This fixture is covered by Con-Tech's full one (1) year replacement guarantee after date of purchase.

Listing

cULus listed. Suitable for dry locations.

Ordering Information

Example Order: **LT** - -

1-Circuit Section Length

LT - -

Finish

- 2** - 2' (24") Length; 20-1/8" Actual Length
- 4** - 4' (48") Length; 44-1/8" Actual Length
- 6** - 6' (72") Length; 68-1/8" Actual Length
- 8** - 8' (96") Length; 92-1/8" Actual Length
- 12** - 12' (144") Length; 140-1/8" Actual Length

- B** - Black
- P** - White
- S** - Silver*

*Not Available in 12' Sections

LA11 end caps are supplied with all track sections and may be ordered separately as needed. See other sheets for Recessed Track Systems and 120V Track Accessories. 2', 4', and 6' sections supplied with (2) toggle bolts, 8' and 12' sections supplied with (3) toggle bolts.

