

WS075


Quadris

**Decorative Metal
Rectangular Curve Wall Sconce**


Catalog No. _____

Type _____


Project _____




1 - Horizontal




2 - Vertical




3 - Squares




4 - Oval



5 - Trio



6 - Mosaic



7 - Window

Specifications/Features

Fixture

Metal faceplate over an acrylic diffuser provides a soft, luminous glow while illuminating the surrounding wall. Ideal for low glare applications.

Select from seven different faceplate designs in Antique Bronze, Black, Silver or White finishes.

ADA compliant for use throughout your building space.

Sconce measures 9-3/8"W x 10-1/4"H x 3-7/8"D

Plastic housing fitted with rubber seal for indoor and outdoor use.

Optional colored diffuser sold separately, standard color is white.

Custom faceplate designs and diffuser colors available; consult factory.

Lamp/Electrical

120V Electronic ballast. Minimum starting temperature: -13°F (-25)
(1) 13W or 18W Quad Compact Fluorescent lamp; or (1) 26W Triple Tube Compact Fluorescent Lamp.

Mounting

Hardware included for mounting of fixtures to octagonal or rectangular switch junction box.

Warranty

This fixture is covered by Con-Tech's one (1) year full replacement guarantee after date of purchase.

Labels/Usage

cULus listed. Suitable for wet locations (IP44).

Ordering Information

Example Order:


Fixture	Lamp/Ballast	Diffuser Design	Finish	Optional Colored Acrylic Faceplate
<input type="text" value="WS075"/>	<input type="text" value="113E12"/>	<input type="text" value="1"/>	<input type="text" value="AB"/>	<input type="text" value="WS075A"/>
	(1) 13W Quad Lamp, Single Volt Electronic Ballast, 120V	1 - Horizontal	AB - Antique Bronze	WS075A - Amber
		2 - Vertical	B - Black	WS075B - Blue
		3 - Squares	S - Silver	WS075G - Green
		4 - Oval	W - White	WS075R - Red
		5 - Trio		WS075Y - Yellow
		6 - Mosaic		
		7 - Window		



adris

WS075113E126B

Lamp: (1) 13W DTT CFL
 Light Output (Lumens): 900
 Watts@120V: 11.8
 Lumens Per Watt: 76.3
 LM-63 Test No.: 57825

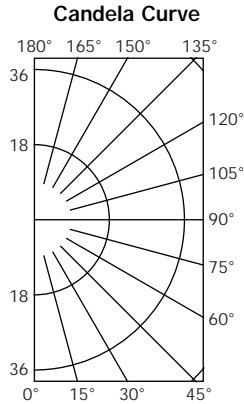

Candlepower Summary

FROM 0	CANDELA	LUMENS
0	2	0
5	3	0
15	7	1
25	9	1
35	12	2
45	15	4
55	17	6
65	19	9
75	20	12
85	21	14
95	22	15

Coefficients of Utilization

RC RW	80%		70%		50%	
	50%	30%	50%	30%	50%	30%
0	34	34	31	31	26	26
1	28	26	25	23	20	19
2	23	21	21	19	17	15
3	20	17	18	15	14	12
4	17	14	16	13	12	10
5	15	12	14	11	11	9
6	13	10	12	10	10	8
7	12	9	11	8	9	7
8	11	8	10	7	8	6
9	10	7	9	6	7	5
10	9	6	8	6	6	5

WS075118E126B

Lamp: (1) 18W DTT CFL
 Light Output (Lumens): 1250
 Watts@120V: 14.9
 Lumens Per Watt: 83.9
 LM-63 Test No.: 57826

Candela Curve



Candlepower Summary

FROM 0	CANDELA	LUMENS
0	3	0
5	5	0
15	9	1
25	13	3
35	16	5
45	20	8
55	23	11
65	25	14
75	26	16
85	27	18
95	27	18


Coefficients of Utilization

RC RW	80%		70%		50%	
	50%	30%	50%	30%	50%	30%
0	32	32	29	29	24	24
1	26	24	24	22	19	18
2	22	19	20	18	16	14
3	19	16	17	14	14	12
4	16	13	15	12	12	10
5	14	11	13	10	10	8
6	13	10	11	9	9	7
7	11	9	10	8	8	6
8	10	8	9	7	7	6
9	9	7	8	6	7	5
10	8	6	8	5	6	4

WS075126E126B

Lamp: (1) 26W DTT CFL
 Light Output (Lumens): 1800
 Watts@120V: 18.5
 Lumens Per Watt: 97.3
 LM-63 Test No.: 57827

Candela Curve

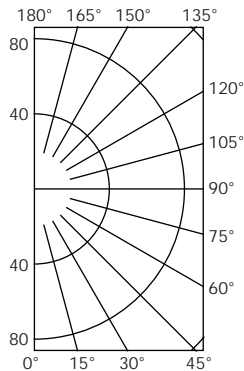

Candlepower Summary

FROM 0	CANDELA	LUMENS
0	6	0
5	9	1
15	17	2
25	25	5
35	33	9
45	41	14
55	48	19
65	53	24
75	57	28
85	59	30
95	59	30

Coefficients of Utilization

RC RW	80%		70%		50%	
	50%	30%	50%	30%	50%	30%
0	38	38	34	34	28	28
1	30	28	27	26	22	21
2	25	23	23	20	18	17
3	22	19	20	17	16	14
4	19	16	17	14	14	11
5	17	13	15	12	12	10
6	15	11	13	10	11	8
7	13	10	12	9	10	7
8	12	9	11	8	9	6
9	11	8	10	7	8	6
10	10	7	9	6	7	5