


## Trims for 6" Sloped Ceiling Incandescent Recessed Housings

All trims are compatible with 6 Inch Incandescent Sloped Ceiling Recessed Housings: RL38A and RL38A-ICS.

**All trims have white trim finish unless specified.**

All trims are suitable for damp locations; only shower trims are listed for wet locations.

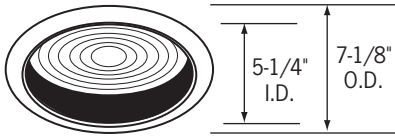

### CTR1331-P

Black Aluminum Baffle, Regressed Glass Convex Prismatic Lens


### CTR1331-P-WHT

White Aluminum Baffle, Regressed Glass Convex Prismatic Lens

Softened illumination for indoor and outdoor installations. Adjustable to accommodate different ceiling thicknesses. Wet location listed. Glass fresnel lens accessory available: **1331 LENS**.

**Max. Lamp:**

RL38A: 60W A19  
RL38A-ICS: 50W PAR30, 40W A19

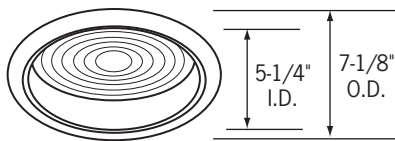

### CTR1332-P-CLR

Clear Polished Specular Multiplier, Regressed Convex Prismatic Glass Lens


### CTR1332-P-WHT

White Multiplier, Regressed Convex Prismatic Glass Lens

Softened illumination for indoor and outdoor installations. Adjustable to accommodate different ceiling thicknesses. Lexan fresnel lens accessory available: **1332 LENS**.

**Max. Lamp:**

RL38A: 60W A19  
RL38A-ICS: 50W PAR30, 40W A19

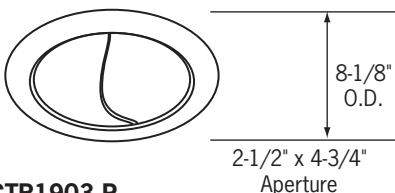


### CTR1903-P

Scoop Wall Wash

White beveled steel trim ring. Polyethylene sponge gaskets. (2) Butterfly spring clips. All steel construction.

**Max. Lamp:**

RL38A: 60W A19  
RL38A-ICS: 40W A19

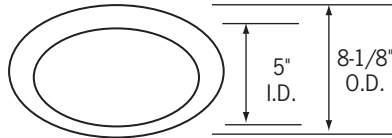

### CTR1912-P

Albalite Shower Trim

Wet location listed. White beveled steel trim ring. Polyethylene sponge gaskets. Flat opal Albalite glass. (2) Butterfly spring clips. Heat-treated steel. ETL listed for use with four other housing manufacturers.

**Max. Lamp:**

RL38A: 60W A19  
RL38A-ICS: 40W A19




### CTR1913-P

Fresnel Shower Trim

Wet location listed. White beveled steel trim ring. Polyethylene sponge gaskets. Flat, clear Fresnel glass lens. (2) Butterfly spring clips. Heat-treated steel. ETL listed for use with four other housing manufacturers.

**Max. Lamp:**

RL38A: 60W A19  
RL38A-ICS: 40W A19

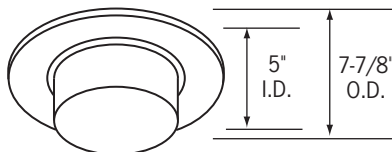

### CTR1916-P

Drop Opal Shower Light, Glass Lens, White Beveled Steel Trim, 1" Drop from Ceiling


### CTR1916-PP

Drop Opal Shower Light, Plastic Lens, White High Heat ABS Trim, 1-1/2" Drop from Ceiling

Wet location listed. Polyethylene sponge gaskets. Flat, clear Fresnel glass lens. (2) Butterfly spring clips. Heat-treated steel. ETL listed for use with four other housing manufacturers.

**Max. Lamp:**

RL38A: 60W A19  
RL38A-ICS: 40W A19

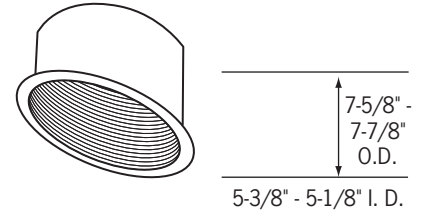

### CTR3801SC-P

Black Baffle Trim


### CTR3801SC-WHT

White Baffle Trim

One piece aluminum baffle, white plastic trim ring. Coil spring retention.

**Max. Lamp:**

RL38A: 120W R40, 90W PAR38  
RL38A-ICS: 90W PAR38

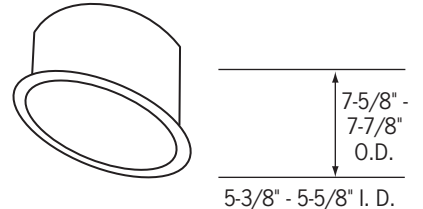


### CTR3802SC-CLR

Clear Multiplier Trim

One piece aluminum multiplier, white plastic trim ring. Coil spring retention.

**Max. Lamp:**

RL38A: 120W R40, 90W PAR38  
RL38A-ICS: 90W PAR38

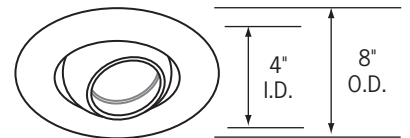

### CTR3008-(B, P)

Eyeball Trim

35° Vertical adjustment. Beveled steel trim ring. Polyethylene sponge gaskets. (2) Butterfly spring clips. Heat-treated steel. ETL Listed for use with four other housing manufacturers. Steel eyeball construction.

**Max. Lamp:** 75W PAR30/R30, 65W BR30

**Reflector Finish Options:**

CLR - Clear    WHT - White

**Trim Finish Options:**

B - Black    PP - White Plastic  
P - White