


Compact Fluorescent Recessed Housing Accessories




Mounting Kit

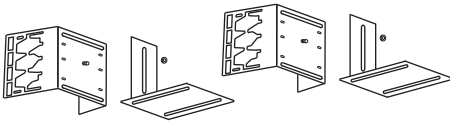

RL-KIT

Commercial mounting brackets for all types of suspended ceilings. Includes butterfly slots for C-Channel Mounting Brackets (HBC-24) and vertical slots for Flat Hanger Bar Set (HB-24). Provides up to 5" of vertical adjustment and variable settings with choice of slots. Supplied with extra vertical bracket with extended foot plate to allow use on long or short sides of plaster frame.




Flat Hanger Set



HB-24

Flat hanger set for use with RL-KIT in T-bar, grid or concealed spline ceilings. Spans 24" ceiling grid. Actual length: 27".

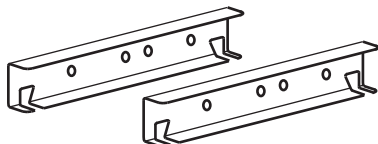


C-Channel Hanger Set



HBC-24

C-channel hanger bar set for use with RL-KIT in grid ceiling construction. Provides firm, no-sag installation with 24" spacing (actual length 25-1/4"). Notched for placement on inverted T-bar ceilings.

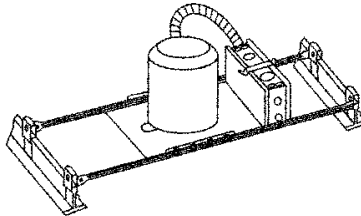


T-Bar Hanger Sets



HB-30

Optional T-bar hanger set. Adjustable 11" > 26". 5/8" wide bar. Use with RL16, RL20, RL30 and RL38 series.

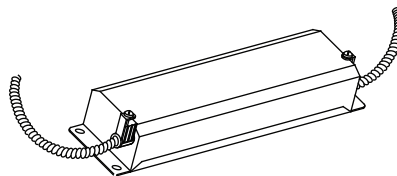

Emergency Battery Back-Up Kits



EB2

Factory Installed 2-PIN 650 Lumen Emergency Ballast with Remote Test Switch

EB2R

Remote 2-PIN 650 Lumen Emergency Ballast with Remote Test Switch

EB4

Factory Installed 4-PIN 650 Lumen Emergency Ballast with Remote Test Switch

EB4-IS

Factory Installed 4-PIN 650 Lumen Emergency Ballast with Internal Test Switch

EB4R


Remote 4-PIN 650 Lumen Emergency Ballast with Remote Test Switch

EBH-IS

Factory Installed 4-PIN 1300 Lumen Emergency Ballast with Internal Test Switch

EB BRACKET

Mounting Bracket for Remote Emergency Ballast Units. Contact Factory for More Information.



Louver Inserts




CTR64C-CLR

6" diameter cross hair louver insert, spring retention. Clear specular aluminum finish. NOTE: 6" I.D. aperture trim required.

CTR84C-CLR

8" diameter cross hair louver insert, spring retention. Clear specular aluminum finish. NOTE: 8" I.D. aperture trim required.

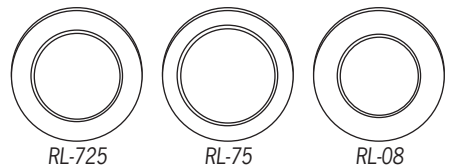

RL-725

RL-75

RL-08

Trim Rings



RL-725-(B, P)

Minimum trim ring for 6" trim, 7-1/4" O.D.

RL-75-(B, P)


Replacement trim ring for 6" trim, 7-1/2" O.D.

RL-08-(B, P)

Oversized trim ring for 6" trim, 7-13/16" O.D.

-B - Black, -P - White

Housing Options



Consult Con-Tech for specifications and compatibility before ordering.

347V

**CP - Chicago Plenum
DIMMING BALLASTS**